


PureFX[®] Micro



Recessed Micro

1'x1'

2 CFL (26W)



Project Name

Spec Type

Notes

Order Guide

Some combinations of product options may not be available. Consult factory for assistance with your specification.


9411			C226	-		-		-		-	
Product Series & Size	Version	Configuration	Lamping	Housing	Wiring	Voltage	Ballast				
PureFX Micro 1'x1'	D1 Standard T-Grid or Drywall	ST Standalone	2 CFL (26W) TRT/GX-24q-3/4	S Standard (22ga.) N New York (20ga.) C Chicago Plenum	1 1 cct 5 1 cct w/ Battery Pack 7 1 cct Dimming	1 120V 2 277V 3 347V*	E Standard Ballast				
	See details on reverse				Consult website for complete list of standard wiring options	*Note: Some options may not be available for each configuration. Consult factory for details.	Consult Ledalite for ballast manufacturer information				

Upgrades & Accessories


Please indicate with check mark.

- Lamps Included
- Hanger Kit
See details on reverse


Cross Section

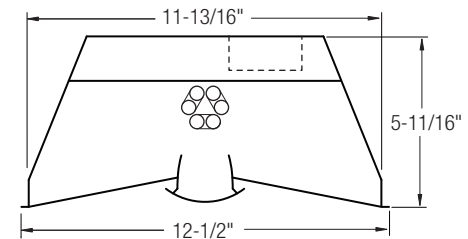

Side View



Side (Housing)




Top (Lens Frame)

PureFX[®] Micro

Recessed Micro

1'x1'

2 CFL (26W)



Photometry

Report Summary


Report # LTL13479
Filename 9411D1C226.ies
Efficiency 61.3%

Spacing Criteria 1.2 @ 0° along
 1.2 @ 90° across

Meets RP-1-04 recommendations for VDT-Normal spaces

Candela Distribution

Vertical Angle	Horizontal Angle					Zonal Lumens
	0	22.5	45	67.5	90	
0	1050	1050	1050	1050	1050	
5	1048	1046	1046	1047	1046	102
15	1007	1009	1017	1022	1023	286
25	914	918	920	911	905	419
35	739	733	714	688	677	443
45	512	502	489	475	468	378
55	326	319	314	312	308	284
65	188	184	184	187	188	185
75	72	76	84	92	96	91
85	10	13	19	22	23	22
90	0	0	0	0	0	

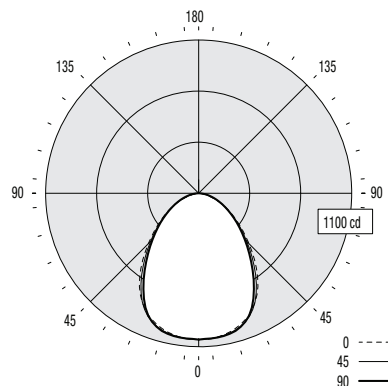

Coefficients of Utilization (%)

Ceiling: Wall:	80				70				50				0			
	70	50	30	10	70	50	30	10	70	50	30	10	70	50	30	10
0 RCR	73	73	73	73	71	71	71	68	68	68	61	61	61	61	61	61
1	67	65	62	60	66	63	61	61	59	58	53	53	53	53	53	53
2	62	57	54	51	60	56	53	54	51	49	46	46	46	46	46	46
3	57	51	47	43	56	50	46	49	45	42	39	39	39	39	39	39
4	53	46	41	37	51	45	41	44	40	37	34	34	34	34	34	34
5	49	42	37	33	48	41	36	40	35	32	30	30	30	30	30	30
6	45	38	33	29	44	37	32	36	32	29	27	27	27	27	27	27
7	42	34	29	26	41	34	29	33	29	26	24	24	24	24	24	24
8	39	32	27	23	38	31	27	30	26	23	22	22	22	22	22	22
9	37	29	24	21	36	29	24	28	24	21	20	20	20	20	20	20
10	35	27	22	19	34	27	22	26	22	19	18	18	18	18	18	18

Based on a floor reflectance of 0.2

Avg. Luminance (cd/m²)

Vertical Angle	Horizontal Angle		
	0	45	90
55	7225	6959	6826
65	5655	5535	5655
75	3536	4126	4715
85	1459	2771	3355


IES files for this and other photometric options can be downloaded online at www.ledalite.com

Additional Information


Optional Hanger Kit

Kit includes:


2x 27" hanger bars




2x redirection bars*




4x T-bar anchor clips



Mounted to Joists




Mounted to T-Bar Grid

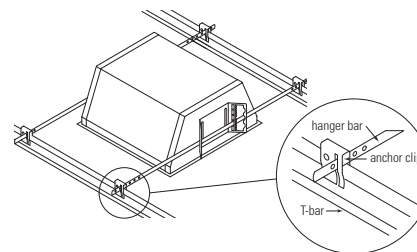


*If required, redirection bars enable mounting 90° from fixture's default orientation

Alternate Mounting Methods

Conduit



Channel



Specifications

Due to continuing product improvements, Ledalite reserves the right to change specifications without notice.

Housing

Die-formed, post-painted, 22 gauge cold-rolled steel (New York City version is 20 gauge).

Weight

Maximum 7.1 lb.

Optical System

Optical assembly consists of flat acrylic panels and extruded curved acrylic lens. A protected MesoOptics[®] film layer creates optimal light distribution and high efficiency. The optical frame is constructed from die-formed, spot-welded, 22 gauge cold-rolled steel assembled together with extruded aluminum profiles in a sturdy frame. The frame allows tool-free access to the inside of the fixture by way of expansion springs. Maintenance can be performed from below the ceiling.

Mounting

Fixture is compatible with most common T-bar ceiling types and non-accessible ceilings. Butterfly mount brackets (attached to housing) are designed to work with optional hanger kit, or with EMT conduit or metal channel (supplied by others). Brackets allow post-installation adjustment of fixture height. Optional hanger kit includes hanger bars, T-bar anchor clips and redirection bars to enable mounting 90° from the fixture's default orientation.

Ballast

Electronic. Supplied with pre-installed ballast disconnects as per changes to the National Electric Code.

Wiring

Multiple wire entrances are available (top or side) to allow easy wiring access. Available with battery pack. Consult factory for details.

Approvals

Certified to UL & CSA Standards.
 City of Chicago Approved CCEA (housing option C).
 Designed to comply with NYC code requirements (Housing Option N).

Finish

Housing and frame are post-painted, high quality powder coat. Available in white only.

IMPORTANT: Fixtures are rated for non-IC installations only. Do not install insulation within 3" (76 mm) of any part of the luminaire.